


CTV2KM-64 Vision System



**Includes
automatic and
manual part
recognition**

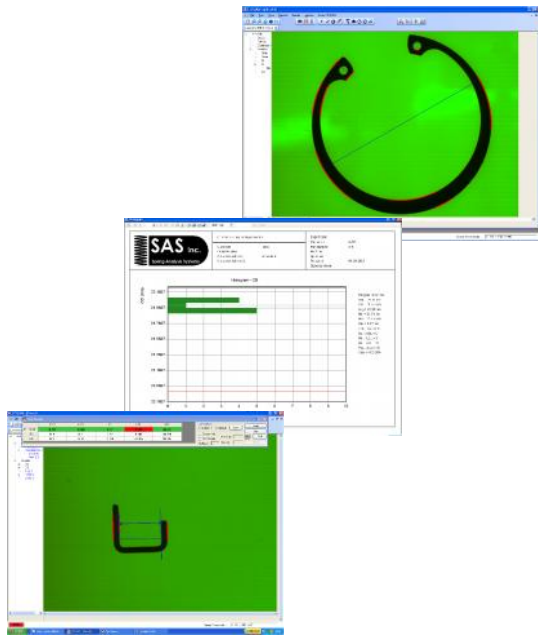

Specifications

Camera Type	5Mpixel Industrial CMOS
Lens	1-7808 telecentric
Lens connection	C type
Minimum part size	0.5 x 0.5mm 0.02" x 0.02"
Maximum part size	64 x 48mm 2.52"x1.89"
Includes Z servo axis	No – Manual Z Motion- Standard
Includes XY servo axes	No
Vision space resolution	0.021mm 0.00083"
Vision space accuracy	±0.0105mm (±0.000414") only with sub-pixel interpolation
Includes SPC	Yes
User Interface	19" Wide LCD display
PC minimum configuration	Intel Core 2 Duo, 2.66GHz, 4Gbyte RAM 500 Gbyte HDD
Operating System	Windows XP Pro , Win 7 Pro

Optional Components

- Industrial enclosure for PC, required for shop-floor use.
- Programmable IO Interface including IO hardware
- Programmable front ring light.

Languages

English, German, Turkish and Russian (translation to other languages available).



WWW.SASTESTERS.COM

Ph: +972-9-7603895

Fax: +972-9-7604849

E-Mail: Info@SASTESTERS.COM

Specifications may change without notice