


CTV2KM-70 Vision System



**Includes
automatic and
manual part
recognition**

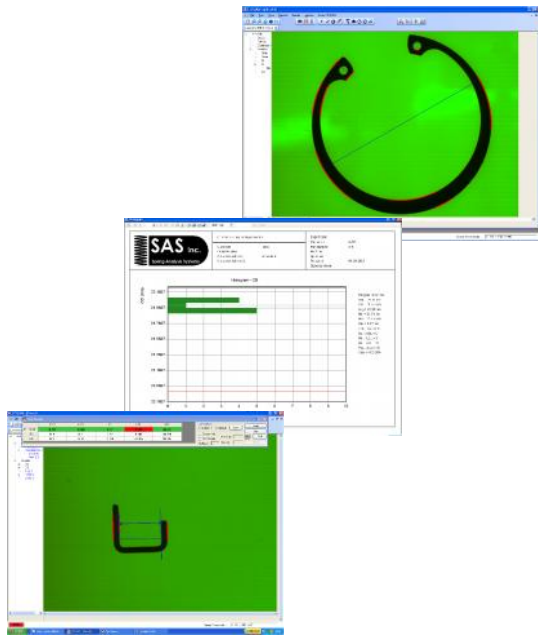

Specifications

Camera Type 5Mpixel Industrial CMOS

Lens 1-7808 telecentric

Lens connection C type

Minimum part size 0.6 x 0.6mm
0.023" x 0.023"

Maximum part size 70 x 50mm
2.76"x1.97"

Includes Z servo axis No – Manual Z Motion- Star

Includes XY servo axes No

Vision space resolution 0.027mm
0.00106"

Vision space accuracy $\pm 0.0135\text{mm}$ (± 0.000531 ") c
sub-pixel interpolation

Includes SPC Yes

User Interface 19" Wide LCD display

PC minimum configuration Intel Core 2 Duo, 2.66GHz, 4Gbyte
RAM
500 Gbyte HDD

Operating System Windows XP Pro , Win 7 Pro

Optional Components

- Industrial enclosure for PC, required for shop-floor use.
- Programmable IO Interface including IO hardware
- Programmable front ring light.

Languages English, German, Turkish and Russian (translation to other languages available).



WWW.SASTESTERS.COM

Ph: +972-9-7603895

Fax: +972-9-7604849

E-Mail: Info@SASTESTERS.COM

Specifications may change without notice